




SPEEDVAC[®] FEED TABLE

Versatility and Performance

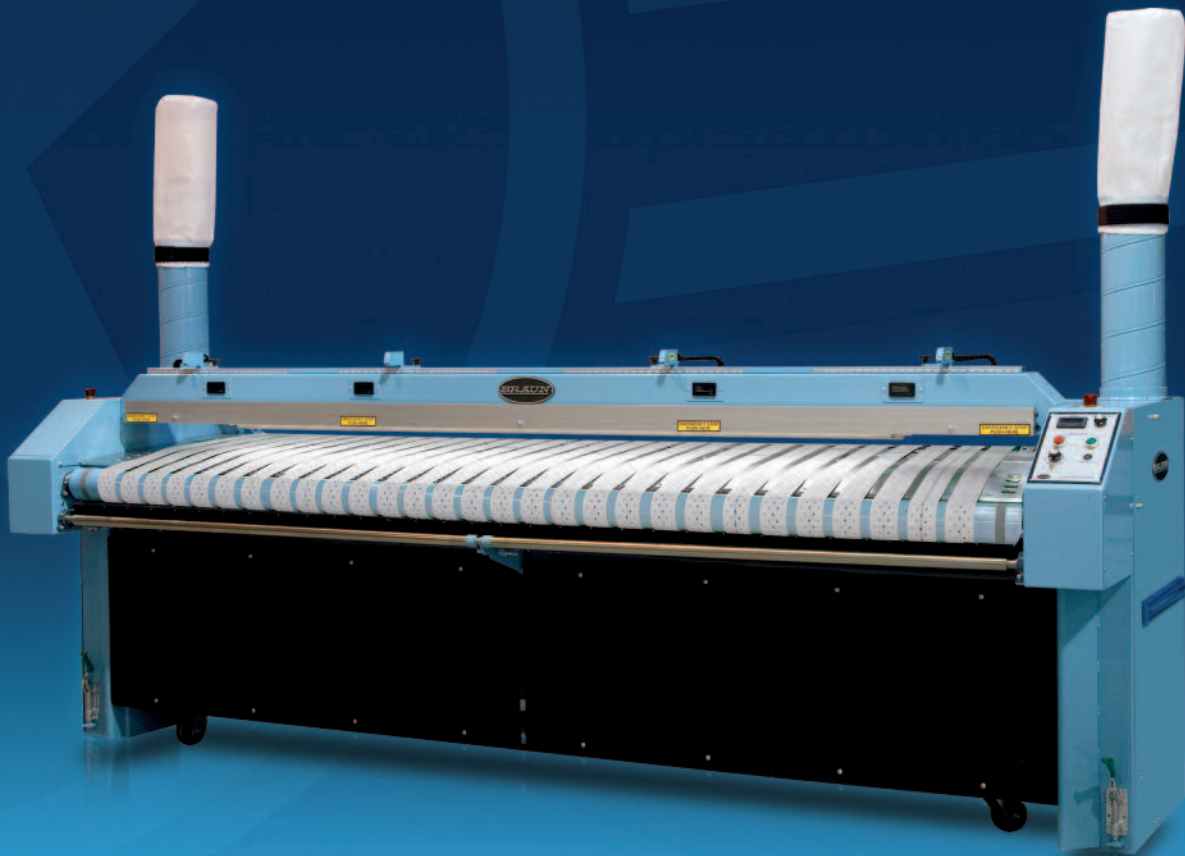

U.S.A.

All Braun Products are Proudly
Manufactured in the U.S.A.

ISO 9001 Certified

gabraun.com

SPEEDVAC® FEED TABLE

BENEFITS


A versatile performer, the Braun SpeedVac® Feed Table accurately processes a wide range of goods – from small flatwork pieces such as napkins, pillow cases and table linens, to California king sheets – with dependable, repeatable quality.

The inverter-driven feed deck is easy to operate and offers variable range speed control to ensure the pieces are taut and aligned for a positive leading edge. The adjustable laser lane indicators provide for visual piece positioning and each lane can be individually counted to easily monitor processing efficiency.

The Braun SpeedVac® Feed Table assists feeding on both the table top and the trailing edge, without cumbersome pressure wheels. And with the vacuum flow equally distributed across the width of the table, different size goods may be processed with non-lane dependent feeding.

An adjustable discharge conveyor meets the requirements of different height ironers, and a built in work light allows for enhanced real-time quality control inspection. And easy-to-clean lint collection bags and LED lane counters add to the simplicity and efficiency of operation.

For reliability, performance and a better finished product, rely on the Braun SpeedVac® Feed Table.

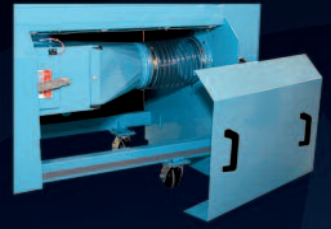

Rear covers are easily removable should you need to access the blowers.



Laser lane indicators.

STANDARD FEATURES

- Vacuum assist feeding of small and large pieces to an ironer
- Adjustable laser lane indicators to provide repeatable guides for hand feeding
- Simple lint collection bags mounted above each side panel
- Digital production counter for each of the feed lanes
- Programmable inverter-type variable speed conveyor drive with digital speed indicator
- Fluorescent lit feed deck
- Caster-mounted for easy movement
- Illuminated Emergency Stop
- 130" working width
- Standard voltages: 208, 240, 480 volt, 3 phase, 60 cycle
- Variable speed blower control for easy adjustment of vacuum air flow

(Available with optional 120" working width for 4 or 5 lane processing)

SPECIFICATIONS

	Opening to Receive Unit	Overall Dimensions	Shipping Dimensions	Shipping Weight
SpeedVac® Feed Table	37"(w) x 56"(h) 940mm (w) x 1425mm (h)	132"(l) x 55"(w) x 44"(h) 3355mm (l) x 1400mm (w) x 1120mm (h)	49" (l) x 144"(w) x 65"(h) 1245mm (l) x 3660mm (w) x 1650mm (h)	1500 lbs 680 Kg

Note: Specifications subject to change without notice



ISO 9001 CERTIFIED

G.A. Braun, Inc.
79 General Irwin Boulevard
N. Syracuse, NY 13212

Mail to:
P.O. Box 3029
Syracuse, NY 13220-3029

Phone
1-800-432-7286

Fax
(315) 475-4130

Parts Help Desk
1-800-432-7286 X 1

Service Help Desk
1-800-432-7286 X 2



U.S.A.

All Braun Products are Proudly
Manufactured in the U.S.A.